


# HF-01SG

Soil & Ground Heat Flux Sensor

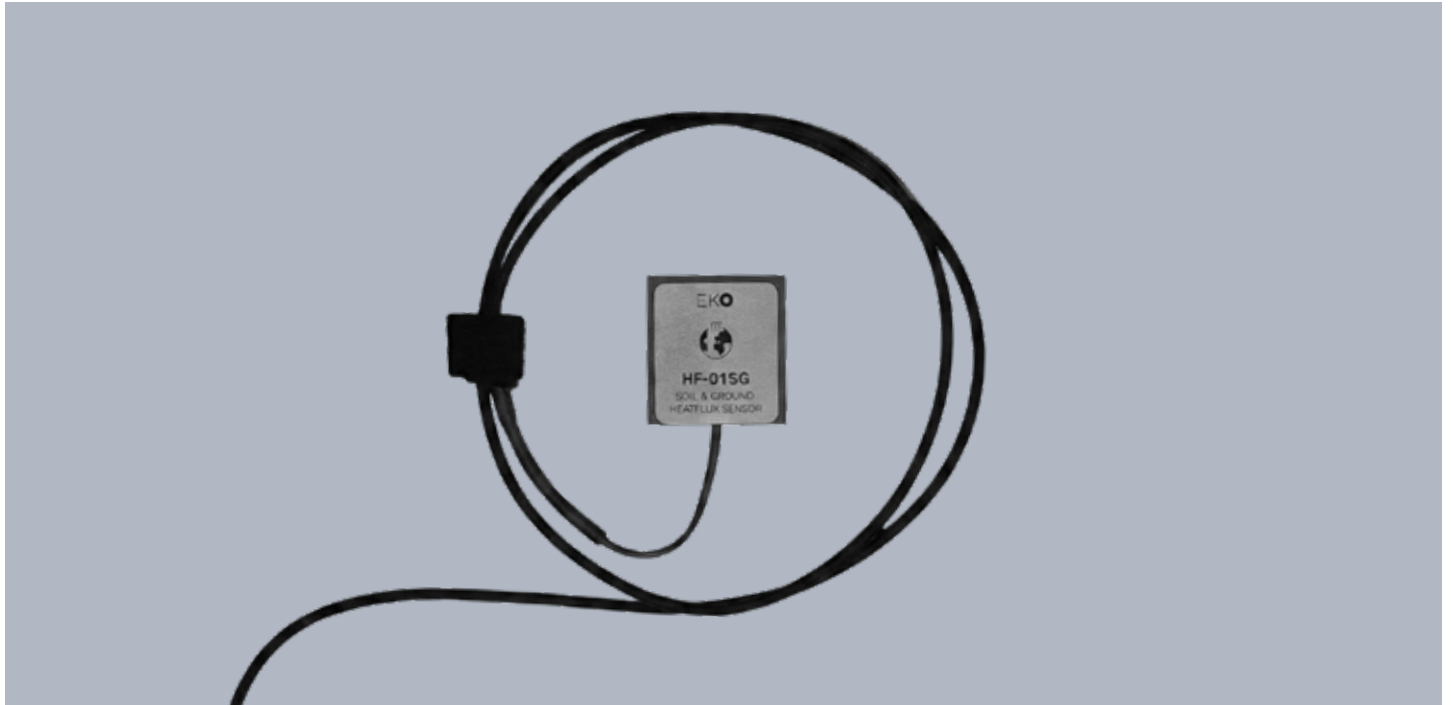

## Overview

The HF-01SG is a small size standard plate type heat flux sensor, developed specifically for soil and ground heat flux measurement applications. It is an ideal option for research and controlling applications related to soil and ground thermal management. Manufactured in compliance with standards ASTM C1046 and ISO 9869, it ensures an even heat flux distribution and therefore a reliable measurement experience. The unique combination of small size, thin body, fast response, and high sensitivity, makes this sensor a perfect choice for accurate measurement of heat flux, even in low heat flux conditions. Thanks to the small and thin body, the sensor's installation is very easy and the disturbance to the soil is minimal. Avoid plant root disturbance caused by large sensors and experience the convenience of this low-key sensor. Never lose the HF-01SG sensors under the ground, and locate them using the location tag, included in the package.

## Features



High sensitivity



Fast response



Thin, small,  
compact form  
factor



Water proof  
(IP67)



Durable &  
versatile



Suitable for burring under  
the soil and ground

## Explore EKO

Made in Japan for over 90 years, EKO solar energy sensors and environmental instruments are built on a legacy of innovation, an uncompromising commitment to quality, and industry-leading accuracy. With a range of products and services to suit every project or application requirement, explore EKO now, or get in touch to find out how EKO Instruments can help you.



Transducers  
MC-20



LI-19 HH  
Datalogger



Thermal  
Conductivity  
Testers



Thermal  
Analysis  
Instruments



Heat Flux  
Sensors

## Sensor Specifications

Nominal Sensitivity	50 $\mu\text{V/W/m}^2$
Time Constant (63%)	< 2 sec
Thermal Resistance	$2.3 \times 10^{-3} \text{ m}^2 \text{ K/W}$
Electric Impedance	8 $\Omega$ – 12 $\Omega$ (+10°C – +40°C)
Operating Temperature Range	-30 to 80°C, cable -20°C to +60 °C
Heat Flux Range	$\pm 10000 \text{ W/m}^2$
Temperature Dependency	0.12 %/°C
Dimensions (L x W x H)	25 x 24 x 2.3 mm
Sensing Area	500 mm <sup>2</sup>
Guard Width	5x thickness of the sensor
Calibration Uncertainty	$\pm 3 \%$ (K=2)
Ingress Protection	IP67
Cable Dimensions	3m (Diameter: 2.1 mm)

## Application


Use HF-01SG to measure the heat flux into or out of the soil. This is essential for determining the soil's energy balance, monitoring ground heat storage, supporting climate research, and optimizing agricultural practices. The sensor can be installed in different soil types and at various depths, making it ideal for field studies, agricultural monitoring, and environmental research. By installing the sensor beneath the soil surface, you can evaluate heat flux at specific depths.

For even greater insight, combine HF-01SG with temperature sensors to determine soil thermal conductivity directly on site. Installation is straightforward, but correct placement is crucial for accurate and reliable data. Follow the **Quick Start Guide** and watch the **Demonstration Video** to ensure proper installation and measurement.



## QR

Use the QR code to visit our website, contact our team, or to find out more about the **HF-01SG**, other related products, and the full range of industry-leading EKO sensors and instruments.



### EKO Instruments Co. Ltd

info@eko.co.jp  
+81 3 3469 6713

### EKO Instruments Sales India

sales-in@eko-instruments.com  
+91 986 904 7721

### EKO Instruments Europe B.V.

sales-eu@eko-instruments.com  
+31 0 703 050 117

### EKO Instruments Sales China

sales-asia@eko-instruments.com  
+81 3 3469 6713

### EKO Instruments USA Inc.

sales-usa@eko-instruments.com  
+1 408 977 7751

### EKO Instruments Sales MENA

sales-mena@eko-instruments.com  
+212 661 418 870



MADE IN  
JAPAN

eko-instruments.com